Easy Setup Guide

Wi-Fi Unit

Modem

Computer

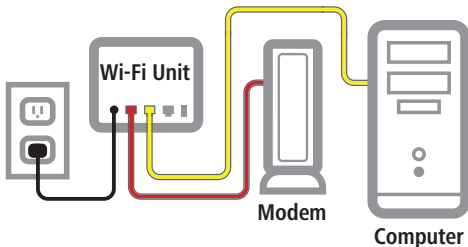## Make the connections to the first Whole Home Wi-Fi unit:

❶ Disconnect your computer or existing router from the Xplornet Modem.

❷ Plug one end of the red cable into the LAN port on the Modem and the other to the red WAN port on the Wi-Fi unit.

❸ If using a computer, take the yellow cable and connect one end to the Whole Home Wi-Fi unit in either one of the two yellow LAN ports and the other end to your Computer's Ethernet port. If not using a computer, skip this step.

❹ Connect the small black power adaptor cord into the Power port on the Wi-Fi units and then plug the other end of the adaptor into a 120-volt household outlet.

Make the setup of the second and any additional Wi-Fi unit(s):

❺ Go to the Apple or Google app store and search for: **Zlife Lite** (published by ZTE)

❻ Install and open the app. Follow directions provided within the app to set up the second or additional Wi-Fi unit(s).

For further information:

Go to **www.xplornet.com** and navigate to the **Support | Getting Started** section.

XPLORNET

Quick User Setup Guide

Using WPS

1 Power-on the first Wi-Fi unit (this will become the controller), and connect it to the access modem via the WAN port on the Wi-Fi unit.

2 Connect to the unit via Ethernet cable, or using the SSID and password on the bottom of the unit.

3 Confirm browsing.

- If still unable to browse, perform a factory rest using the button on the back (Hold for 10 seconds), wait 3 minutes for it to power on fully, and try again.

4 Once online, plug the second (agent) unit into a power outlet where you would like it installed. Wait 3 minutes for it to start up.

5 Press the WPS button on the front of the controller unit, and then on the agent unit. The light on the agent unit will turn blue, once it has synced.

- If it does not turn blue, then the unit may need to be placed closer to the controller unit.
- Repeat for the other agent unit(s) if applicable.

Maximize your Whole Home Wi-Fi coverage

- Reduce the number of walls and ceilings between your Hub and other network devices.
- Place the units at least 6 feet away from electrical devices or components that generate interference like a microwave oven, home security system or blue tooth devices.
- Make sure the agent units are placed at least 10 meters of the controller unit.

Using Zlife Lite mobile app

1 Power on the controller unit, and connect it to the access modem.

2 Connect your device using the SSID and password on the bottom of the unit.

3 Open the Zlife Lite app, The serial number of the unit should populate starting with ZTEEXXXXXX.

4 When you click on it, it will ask for the username and password to log into the router.

- The username will be admin.
- The password with be adminXXXX where X is the last 4 digits of the serial number.

5 There might be a popup to add a new "Satellite", click yes. Otherwise there will be an "Add Satellite" button at the bottom.

6 Follow prompts > Enter the SSID of the Wi-Fi AGENT cube > Wait 5 minutes for the sync to complete.

7 If the above doesn't work, factory reset the agent unit and try again.